



R3(67)A 6.35X31.75mm base fuse holder

R3(67)B 6.35X31.75mm PCB welded fuse holder

1. R3(67)A 6.35X31.75mm base fuse holder

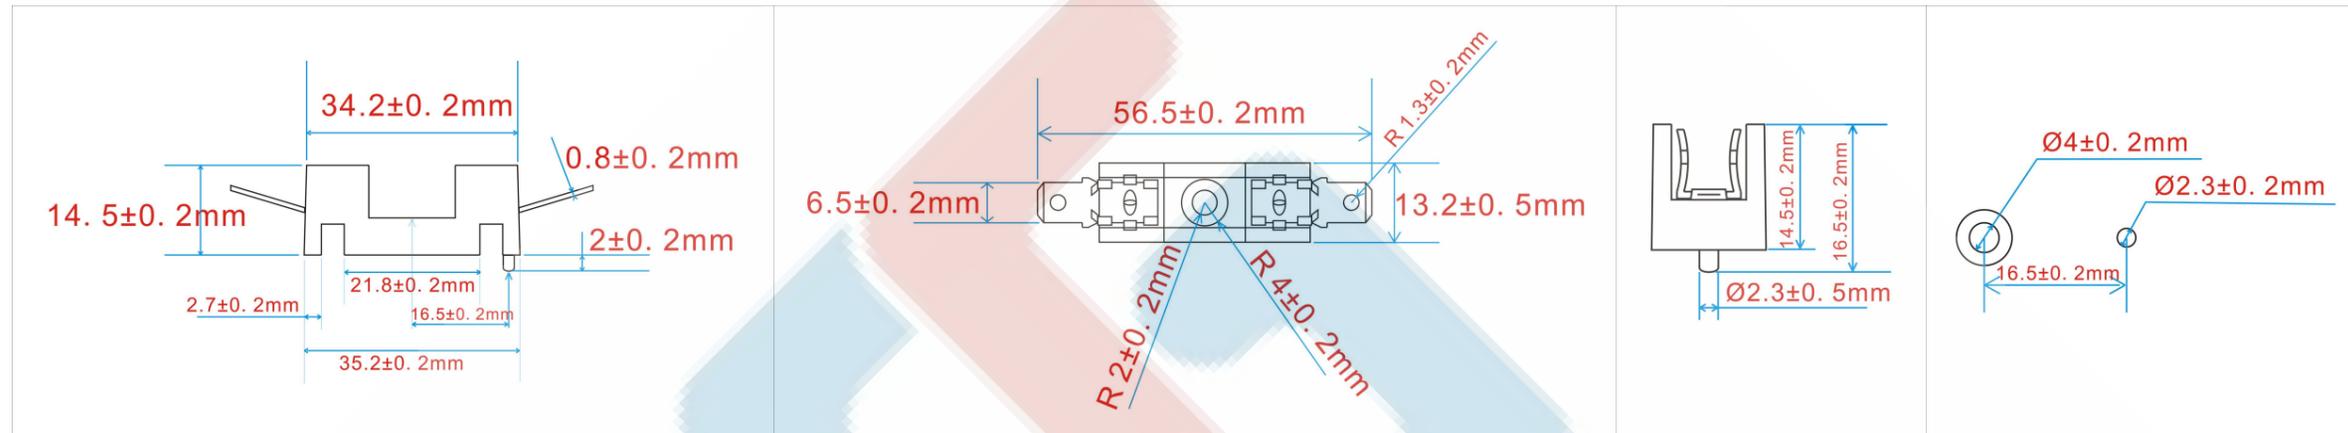

2. R3(67)B 6.35X31.75mm PCB welded fuse holder

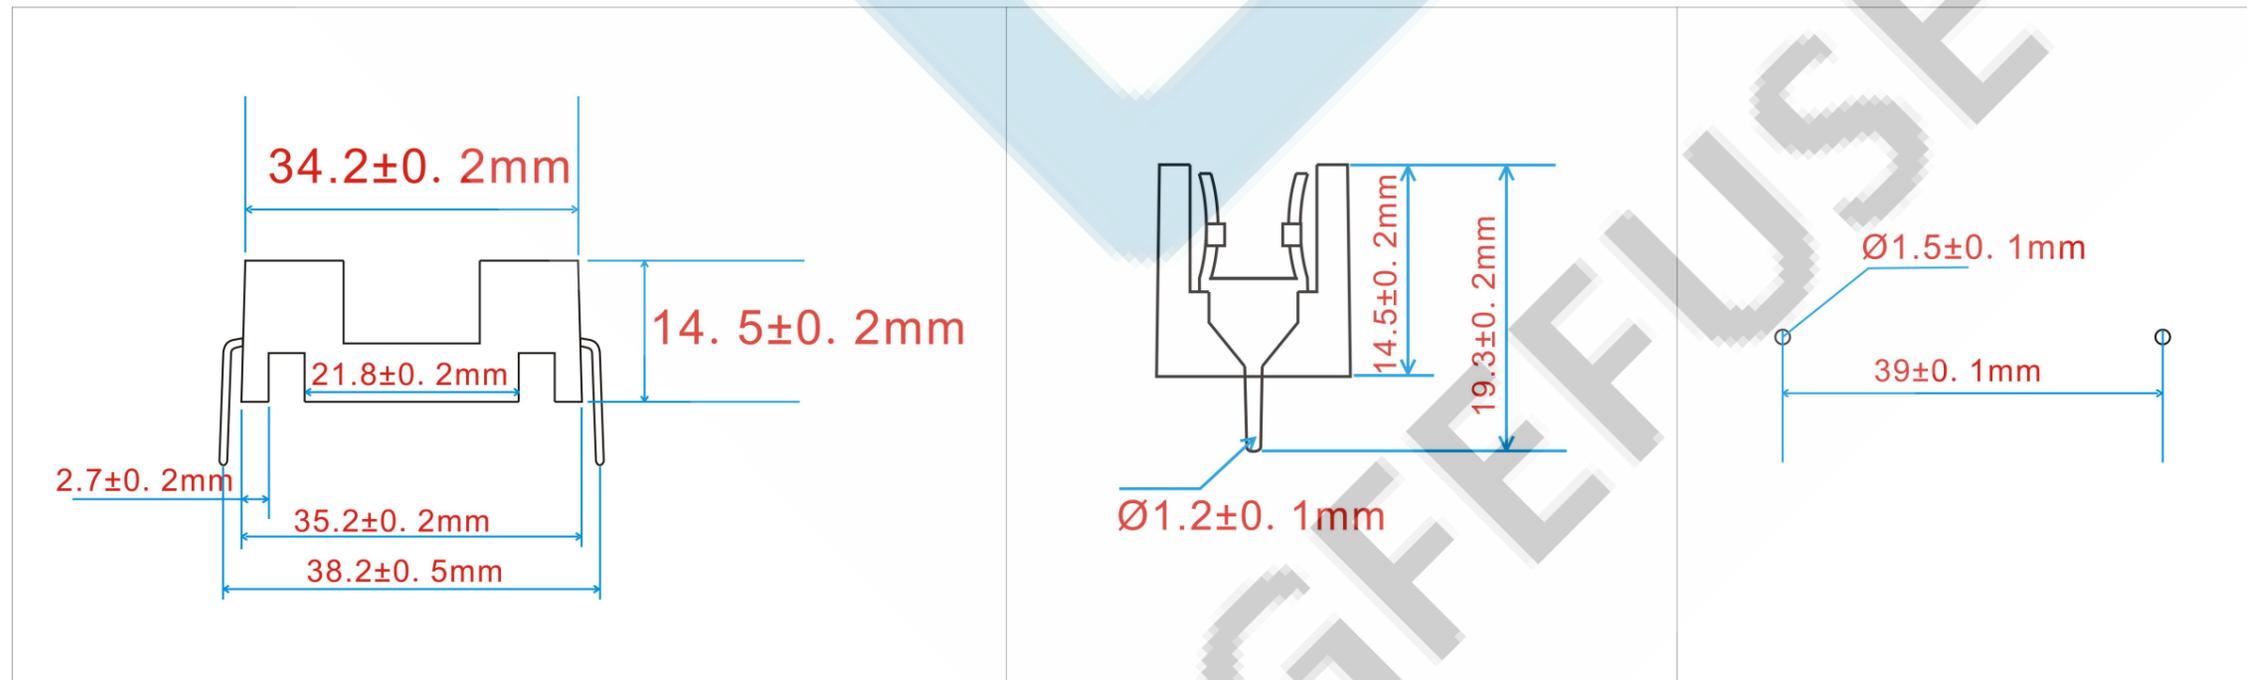

The company has obtained the quality system certification of IATF:16949:2016 automobile industry. The product has obtained UL CE CQC TUV REACH and many international certification.

R3(67)A 6.35X31.75mm base fuse holder

R3(67)B 6.35X31.75mm PCB welded fuse holder

2. Product introduction

**1.Product Type: GFEFUSE®:R3(67)A (6.35X31.75mm base fuse holder)
GFEFUSE®:R3(67)B (PCB welded fuse holder)(6.35x31.75mm fuse)**

2.Base: PBT Contact Point: H65

3. Flame Retardant Grade: UL-94V0

4. Rating range: AC: 250V 50A DC: 1000V 50A

5.Insulation resistance:>100 MΩ

6.contact resistance: <5m Ω

7.Voltage breakdown : >3000Vac

8.Practical: 6.35x31.75mm tubular fuse

Promotion: The company's products are not notified of changes

The company has obtained the quality system certification of IATF:16949:2016 automobile industry.
The product has obtained UL CE CQC TUV REACH and many international certification.